


倒角加工



边的背面倒角加工




型 号 Model. No.	孔 直 径	能 力
		背面倒角加工
UMH12-6.8S-M8	φ6.2超	φ6.8mm~φ9.7mm
UMH12-8.5S-M10	φ7.5超	φ8.5mm~φ11.7mm
UMH12-10S-M12	φ9.0超	φ10.0mm~φ14.8mm
UMH12-12S-M14	φ10.0超	φ12.0mm~φ16.8mm
UMH12-14S-M16	φ12.0超	φ14.0mm~φ18.8mm
UMH16-16S-M18	φ14.0超	φ16.0mm~φ20.8mm
UM12-16S		φ16.0mm超~


“背面” 专用

● 背面倒角专用工具。

- 夹紧螺钉 (M8・M10)
L-18
610円
- 夹紧螺钉 (M12~M18)
L-19
610円
- 扳手 (L-18, L-19共通)
N-4
1,100円




①

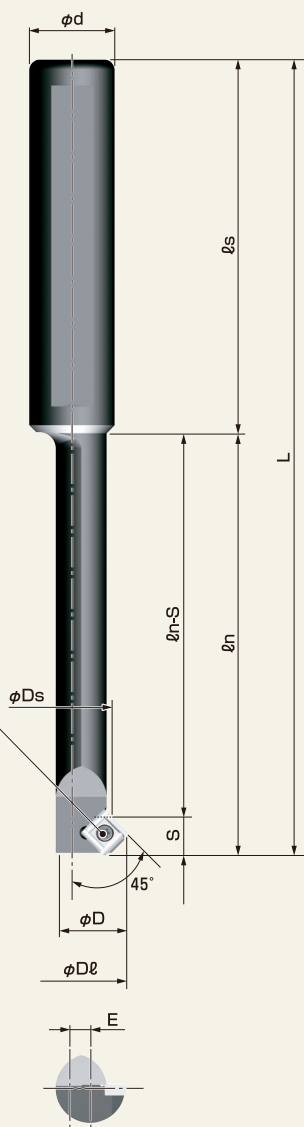

②

- 夹紧螺钉 L-19
610円
- 扳手 N-4
1,100円

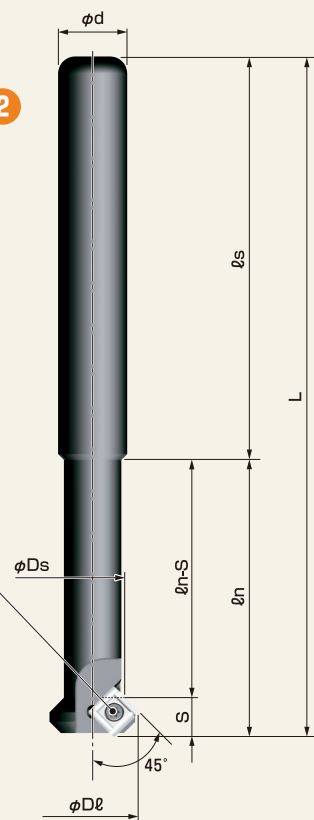

本 体

型 号 Model. No.	图 Fig.	刃 数	尺 寸 Dimensions (mm)											适合刀片 Inserts	价 格 (日元)
			φD	φDℓ	φDs	φd	L	ℓs	ℓn	ℓn-S	S	T	E		
UMH12-6.8S-M8	①	1	6.2	9.7	6.8	12	107	70	37	32.2	4.8	28	1.76	SP-SPET040102	24,500
UMH12-8.5S-M10	①	1	7.5	11.7	8.5	12	117	70	47	42.0	5	38	2.11	SPET040102	24,500
UMH12-10S-M12	①	1	9.0	14.8	10.0	12	129	70	59	52.1	6.9	47	2.92	SPET06T104	24,500
UMH12-12S-M14	①	1	10.0	16.8	12.0	12	134	70	64	57.1	6.9	52	3.42	SPET06T104	24,500
UMH12-14S-M16	①	1	12.0	18.8	14.0	12	139	70	69	62.1	6.9	57	3.41	SPET06T104	24,500
UMH16-16S-M18	①	1	14.0	20.8	16.0	16	149	70	79	72.1	6.9	69	3.41	SPET06T104	24,500
UM12-16S	②	1		16.0	11.0	12	118	70	48	41	7			SPET06T104	17,000

※ 标准配备，刀片请另外购买
※ 标准配备带紧定螺钉和扳手
※ 价格(日元)=建议零售价(日元)

使用刀架		UMH12-6.8S-M8 / UMH12-8.5S-M10 / UMH12-10S-M12 UMH12-12S-M14 / UMH12-14S-M16 / UMH16-16S-M18			UM12-16S			
材质型号		NK1010	NK2020	NK6060	材质型号	NK1010	NK2020	NK6060
被削材质	每齿进给量 (mm/刃)	切削速度 (m/分)				每齿进给量 (mm/刃)	切削速度 (m/分)	
普通钢系列 SS等	0.03~0.05		25~30	25~30	0.05~0.1		50~70	50~70
合金钢系列 SKD/SCM等	0.03~0.05		25~30	25~30	0.05~0.1		50~70	50~70
不锈钢系列 SUS等	0.03~0.05		20~25	25~30	0.05~0.1		40~50	40~50
铝、树脂、 黄铜系列	0.03~0.05	30~35			0.05~0.1	80~100		
铸钢系列 FC/FCD等	0.03~0.05	30~35			0.05~0.1	80~100		

- N10
- G90 G00 G54 X-3.41 Y0 M19
- G43 Z5.0 H3 T11.....①
- G1 Z-18.0 F2000.....②
- X0.....③
- M3 S600
- G1 Z-14.9 F30.....④
- Z-18.0 F200.....⑤
- M19
- X-3.41.....⑥
- G0 Z10.0.....⑦
- G80 Z10.0
- G30 Z10.0

无毛刺,加工面良好

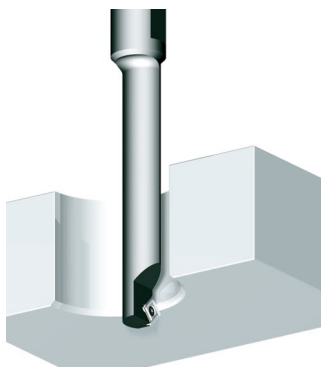


	图	型 号	材 质	边缘形状	涂 层	使用角数	单价(日元)	1盒价格(日元)	1盒数量
●M8用	〈SP-SPET040102〉	SP-SPET040102 NK1010	超硬K10	锐 边	无	1	1,950	23,400	12
		SP-SPET040102 NK2020	超硬M20	珩磨边	无	1	1,950	23,400	12
		SP-SPET040102 NK6060	超硬M20	珩磨边	TiA2N	1	2,600	31,200	12
●M10用	〈SPET040102〉	SPET040102 NK1010	超硬K10	锐 边	无	4	2,300	27,600	12
		SPET040102 NK2020	超硬M20	珩磨边	无	4	2,300	27,600	12
		SPET040102 NK6060	超硬M20	珩磨边	TiA2N	4	2,950	35,400	12
●M12~18/UM12-16S用	〈SPET06T104〉	SPET06T104 NK1010	超硬K10	锐 边	无	4	2,350	28,200	12
		SPET06T104 NK2020	超硬M20	珩磨边	无	4	2,350	28,200	12
		SPET06T104 NK6060	超硬M20	珩磨边	TiA2N	4	2,980	35,760	12

26